

DATA  
OUTPUT

## DIGITAL FORCE GAGE



ISF-DF100A  
type A




ISF-DF5KA  
type B

- Push and pull test
- Peak (max.) and tracking mode
- Units: mN, N, gf, kgf, ozf, lbf
- Low and high limits with judgement
- 1000 memories
- Automatic power off
- Metal case, touch buttons
- LCD display with backlight, can automatically turn 180°
- Overload alarm



printer (optional)

### accessory for type A

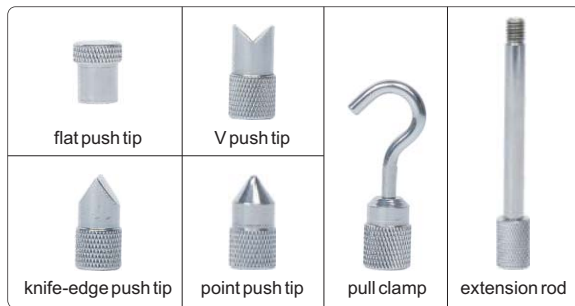

### accessory for type B



### SPECIFICATION

Code *	ISF-DF 2A	ISF-DF 5A	ISF-DF 10A	ISF-DF 20A	ISF-DF 50A	ISF-DF 100A	ISF-DF 200A	ISF-DF 500A	ISF-DF 1KA	ISF-DF 2KA	ISF-DF 5KA	ISF-DF 10KA	ISF-DF 20KA
Type	A (internal sensor)									B (external sensor)			
Load capacity(N)	2	5	10	20	50	100	200	500	1000	2000	5000	10000	20000
Resolution(N)	0.0005	0.0005	0.001	0.005	0.005	0.01	0.05	0.05	0.1	1	1	10	10
Accuracy	±0.3% (of load capacity)												
Power supply	built-in rechargeable battery												

### STANDARD DELIVERY

Code *	ISF-DF 2A	ISF-DF 5A	ISF-DF 10A	ISF-DF 20A	ISF-DF 50A	ISF-DF 100A	ISF-DF 200A	ISF-DF 500A	ISF-DF 1KA	ISF-DF 2KA	ISF-DF 5KA	ISF-DF 10KA	ISF-DF 20KA
Main unit	1pc									1pc			
AC/DC adapter	1pc									1pc			
USB cable and software	1pc									1pc			
Push/pull accessory	6pcs (flat push tip, V push tip, knife-edge push tip, point push tip, pull clamp, extension rod)									4pcs (flat push tip, adapter, pull clamps)			

### OPTIONAL ACCESSORY

Printer	ISF-DF-PRINTER
---------	----------------

\* Add suffix on code No. to devote AC voltage and plug