



DIAL SNAP GAUGE

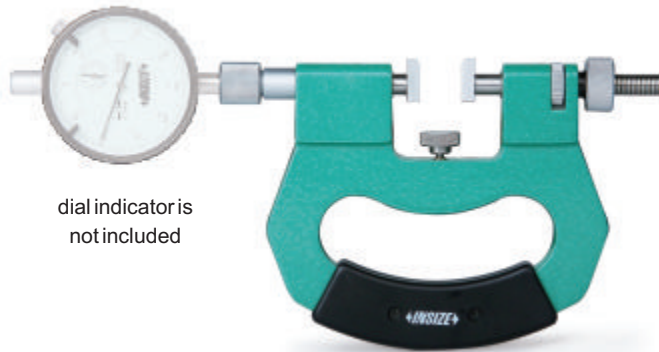


dial indicator is
not included

2185-25W

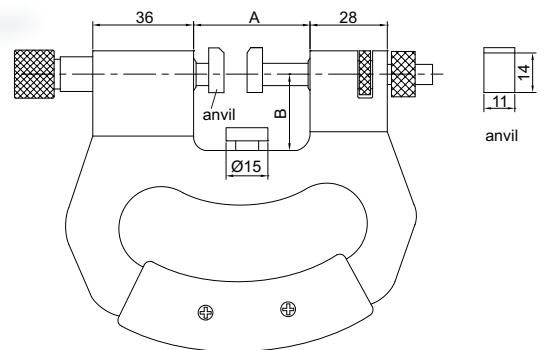

- For quick Go/No-Go judgment of diameter of cylinders and shafts
- Anvil retracting stroke: 3mm
- Measuring force: 6-9N
- Carbide measuring faces
- Front edges of anvils are chamfered for easy workpiece insertion
- Optional indicators:
 - dial indicator, range 0-10mm, graduation 0.01mm
(code 2308-10FA)
 - digital indicator, range 0-12.7mm/0-0.5", resolution 0.001mm/0.00005"
(code 2103-10F)
 - digital indicator, range 0-12.7mm/0-0.5", resolution 0.01mm/0.0005"
(code 2104-10F)

optional indicators

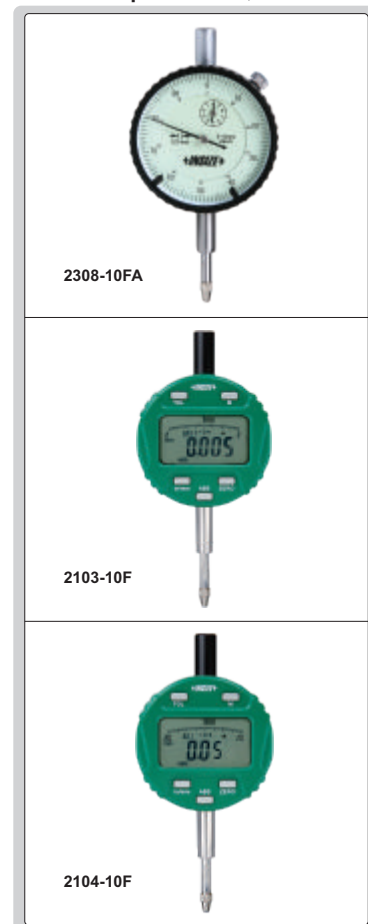

(mm)

Code	Range	A	B
2185-25W	0-25mm	42	20
2185-50W	25-50mm	69	32.5
2185-75W	50-75mm	94	45
2185-100W	75-100mm	119	57.5
2185-125W	100-125mm	144	70
2185-150W	125-150mm	169	82.5
2185-175W	150-175mm	194	95
2185-200W	175-200mm	219	107
2185-225W	200-225mm	244	120
2185-250W	225-250mm	269	132
2185-275W	250-275mm	294	145
2185-300W	275-300mm	319	157