


DIGITAL INDICATOR FOR BORE GAUGES

- Specially designed for bore gauges
- The minimum value tracking function can find the diameter automatically
- Read the diameter directly, after inputting the size of setting ring
- Reading in digit and analog
- Display can be rotated by 320°
- Button function: minimum value tracking, calibration, data preset, inch/metric conversion, absolute/incremental measurement
- CR2032 battery, automatic power off
- USB data output
- Optional accessory: SPC cable (page A1-A2), backs (page F15), contact points (page F11-F14)



2108-10F

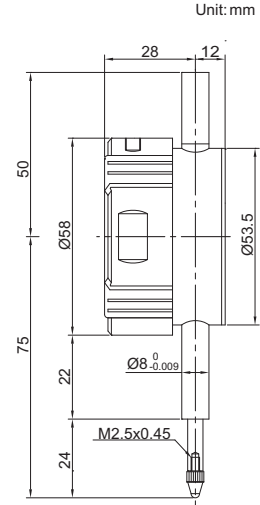

Code	Range	Resolution	Accuracy(f_{ges})	Hysteresis(f_u)	Remark
2108-10F	12.7mm/0.5"	0.002mm/0.0001"	20 μ m	10 μ m	flat back
2108-101F	12.7mm/0.5"	0.001mm/0.00005"	5 μ m	2 μ m	flat back