


DIGITAL INDICATOR WITH LIFTING LEVER



2109-10

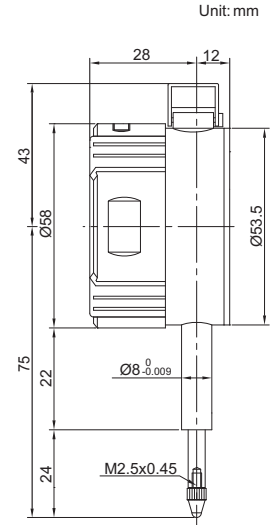

- Reading in digit and analog
- Display can be rotated by 320°
- Button function: tolerance Go and No-Go display, data preset, measuring direction change, max./min./range measurement, inch/metric conversion, absolute/incremental measurement
- CR2032 battery, automatic power off
- USB data output
- Optional accessory: SPC cable (page A1-A2), backs (page F15), contact points (page F11-F14)

| Code | Range | Resolution | Accuracy(f _{ges}) | Hysteresis(f _u) | Remark |
|----------|-----------|------------------|-----------------------------|-----------------------------|-----------|
| 2109-10 | 10mm/0.4" | 0.01mm/0.0005" | 20µm | 10µm | flat back |
| 2109-101 | 10mm/0.4" | 0.001mm/0.00005" | 5µm | 2µm | flat back |