

DIGITAL THREE POINTS INTERNAL MICROMETER


- Resolution 0.001mm/0.00005"
- IP54 dust/waterproof
- Buttons: on/off, set, mm/inch, ABS/INC
- RS232 data output
- SR44 or LR44 battery, automatic power off
- Carbide measuring faces
- Ratchet stop
- Supplied with setting rings
- Optional accessory: SPC cable (page A1-A2)

Individual

Code	Range	Accuracy	Setting ring	L
3127-2	2-2.5mm/0.08-0.10"	4µm	Ø2.5mm	12.5mm
3127-3	2.5-3mm/0.10-0.12"	4µm	Ø2.5mm	12.5mm
3127-4	3-4mm/0.12-0.16"	4µm	Ø4mm	22.5mm
3127-5	4-5mm/0.16-0.20"	4µm	Ø5mm	22.5mm
3127-6	5-6mm/0.20-0.24"	4µm	Ø6mm	22.5mm

Set

Code	Range	Micrometers included	Setting ring
3127-232	2-3mm/0.08-0.12"	2-2.5mm, 2.5-3mm	Ø2.5mm
3127-363	3-6mm/0.12-0.24"	3-4mm, 4-5mm, 5-6mm	Ø4mm, Ø5mm, Ø6mm



3127-4



DIGITAL THREE POINTS INTERNAL MICROMETER

- Resolution 0.001mm/0.00005"
- IP54 dust/waterproof
- Buttons: on/off, set, mm/inch, ABS/INC
- RS232 data output
- SR44 or LR44 battery, automatic power off
- Ratchet stop
- Supplied with setting rings and extension rods
- Optional accessory: SPC cable (page A1-A2)


Individual

Code	Range	Accuracy	Setting ring	Extension rod
3127-8	6-8mm/0.24-0.31"	4µm	Ø6mm	100mm
3127-10	8-10mm/0.31-0.39"	4µm	Ø8mm	100mm
3127-12	10-12mm/0.39-0.47"	4µm	Ø10mm	100mm


Set

Code	Range	Micrometers included	Setting ring	Extension rod
3127-123	6-12mm/ 0.24-0.47"	6-8mm, 8-10mm, 10-12mm	Ø6mm, Ø8mm, Ø10mm	100mm

Unit: mm




3127-12



DIGITAL THREE POINTS INTERNAL MICROMETER

- Resolution 0.001mm/0.00005"
- IP54 dust/waterproof
- Buttons: on/off, set, mm/inch, ABS/INC
- RS232 data output
- SR44 or LR44 battery, automatic power off
- Carbide measuring faces
- Ratchet stop
- Supplied with setting rings and extension rods
- Optional accessory: SPC cable (page A1-A2)

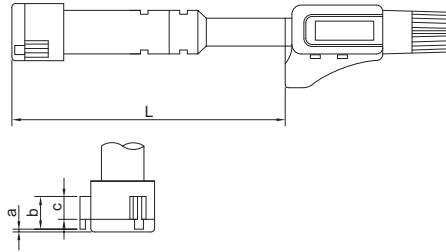

3127-40

Individual


Code	Range	Accuracy	Setting ring	Extension rod	L	a	b	c
3127-16	12-16mm/0.47-0.63"	4µm	Ø16mm	150mm	80	0.5	6	4.5
3127-20	16-20mm/0.63-0.79"	4µm	Ø16mm	150mm	80	0.5	6	4.5
3127-25	20-25mm/0.79-0.98"	4µm	Ø25mm	150mm	90	0.5	8	6
3127-30	25-30mm/0.98-1.18"	4µm	Ø25mm	150mm	90	0.5	8	6
3127-40	30-40mm/1.18-1.57"	4µm	Ø40mm	150mm	97	0.5	14	12
3127-50	40-50mm/1.57-1.97"	5µm	Ø40mm	150mm	97	0.5	14	12
3127-63	50-63mm/1.97-2.48"	5µm	Ø62mm	150mm	114	0.5	17.5	14.5
3127-75	62-75mm/2.44-2.95"	5µm	Ø62mm	150mm	114	0.5	17.5	14.5
3127-88	75-88mm/2.95-3.46"	5µm	Ø87mm	150mm	114	0.5	17.5	14.5
3127-100	87-100mm/3.43-3.94"	5µm	Ø87mm	150mm	114	0.5	17.5	14.5



setting ring

Set


Code	Range	Micrometers included	Setting ring	Extension rod
3127-202	12-20mm/0.47-0.79"	12-16mm, 16-20mm	Ø16mm	150mm
3127-504	20-50mm/0.79-1.97"	20-25mm, 25-30mm, 30-40mm, 40-50mm	Ø25mm, Ø40mm	150mm
3127-1004	50-100mm/1.97-3.94"	50-63mm, 62-75mm, 75-88mm, 87-100mm	Ø62mm, Ø87mm	150mm




extension rod

DIGITAL THREE POINTS INTERNAL MICROMETER

- Resolution 0.001mm/0.00005"
- Each micrometer has two sets of interchangeable jaw for different measuring ranges
- IP54 dust/waterproof
- Buttons: on/off, set, mm/inch, ABS/INC
- RS232 data output
- SR44 or LR44 battery, automatic power off
- Carbide measuring faces
- Ratchet stop
- Supplied with extension rods
- Optional accessory: SPC cable (page A1-A2), setting ring (code 6312)




extension rod



interchangeable jaws

Code	Range	Accuracy	Extension rod
3127-125	100-125mm/3.94-4.92"	5µm	150mm
3127-150	125-150mm/4.92-5.91"	5µm	150mm
3127-175	150-175mm/5.91-6.89"	5µm	150mm
3127-200	175-200mm/6.89-7.87"	5µm	150mm
3127-225	200-225mm/7.87-8.86"	7µm	150mm
3127-250	225-250mm/8.86-9.84"	7µm	150mm
3127-275	250-275mm/9.84-10.83"	7µm	150mm
3127-300	275-300mm/10.83-11.81"	7µm	150mm

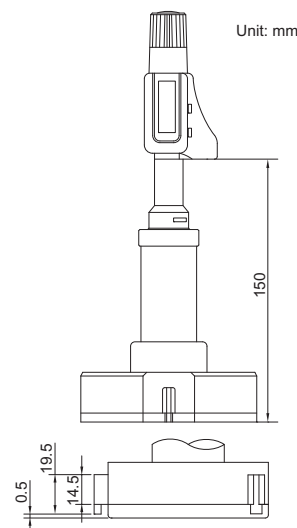

3127-125